



# Mighty

## LED High Mast Light

CE

# FEATURES

## Laser pointer

Contractors can now aim the Mighty accurately in the daytime by fitting a high power laser pointer.



## Tough IP66 and IK10 construction



## Up to 185lm/W



## High efficient heat dissipation performance

## Concealed cable design

The cables of each module are hidden in the side cable ducts to prevent bird spiking.

## Easy installation


Universal mounting bracket and angle adjustment dial makes installing the Mighty a breeze adjustable angle  $\pm 90^\circ$ .

# SPECIFICATIONS

|                                |                                   |              |               |               |               |               |
|--------------------------------|-----------------------------------|--------------|---------------|---------------|---------------|---------------|
| Model No.                      | LDL-PO20-500                      | LDL-PO20-600 | LDL-PO20-1000 | LDL-PO20-1200 | LDL-PO20-1500 | LDL-PO20-1800 |
| Rated Wattage                  | 500W                              | 600W         | 1000W         | 1200W         | 1500W         | 1800W         |
| Luminous Flux                  | 92,500lm                          | 111,000lm    | 185,000lm     | 222,000lm     | 277,500lm     | 333,000lm     |
| Efficacy                       | Up to 185lm/W                     |              |               |               |               |               |
| Rated Voltage                  | AC180-528V, 50/60Hz               |              |               |               |               |               |
| Beam Angle                     | 12°(15°/25°/40°/T30 Optional)     |              |               |               |               |               |
| CCT                            | 5000K(3000K/4000K/5700K Optional) |              |               |               |               |               |
| CRI                            | Ra70(Ra80/Ra90 Optional)          |              |               |               |               |               |
| IP Rating                      | IP66                              |              |               |               |               |               |
| Warranty                       | 5 years                           |              |               |               |               |               |
| Working temperature            | -30℃~+50℃                         |              |               |               |               |               |
| Net Weight<br>(Without Driver) | 10.4kg                            | 10.4kg       | 18.4kg        | 18.4kg        | 24.6kg        | 24.6kg        |

\*Specifications subject to change without notice.

# DIMENSIONS(mm)

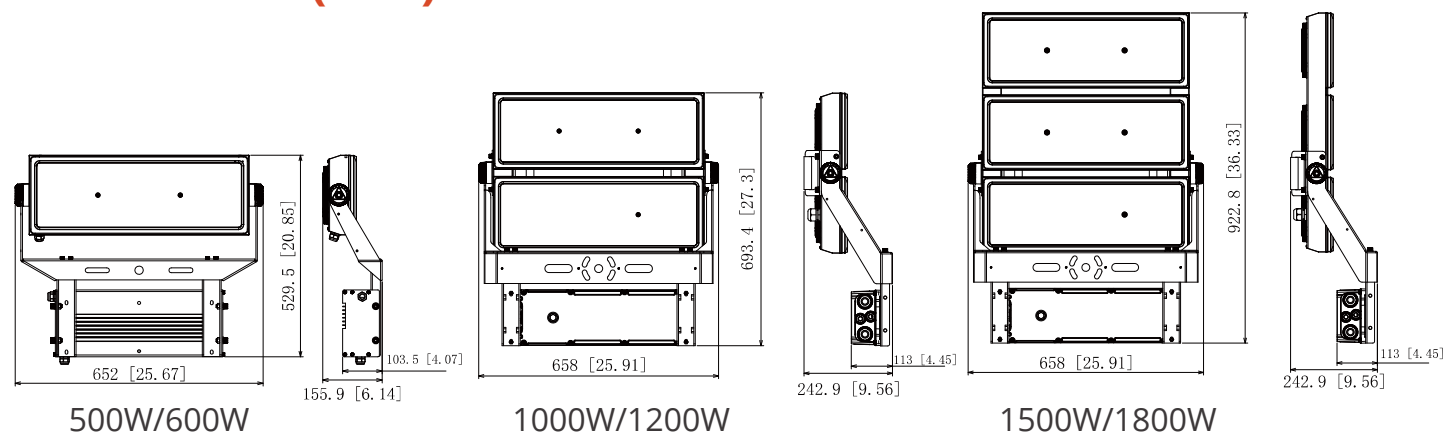

# APPLICATIONS

Applicable to sports field, stadium and port, etc.

